


# D.K.I. MANUFACTURING

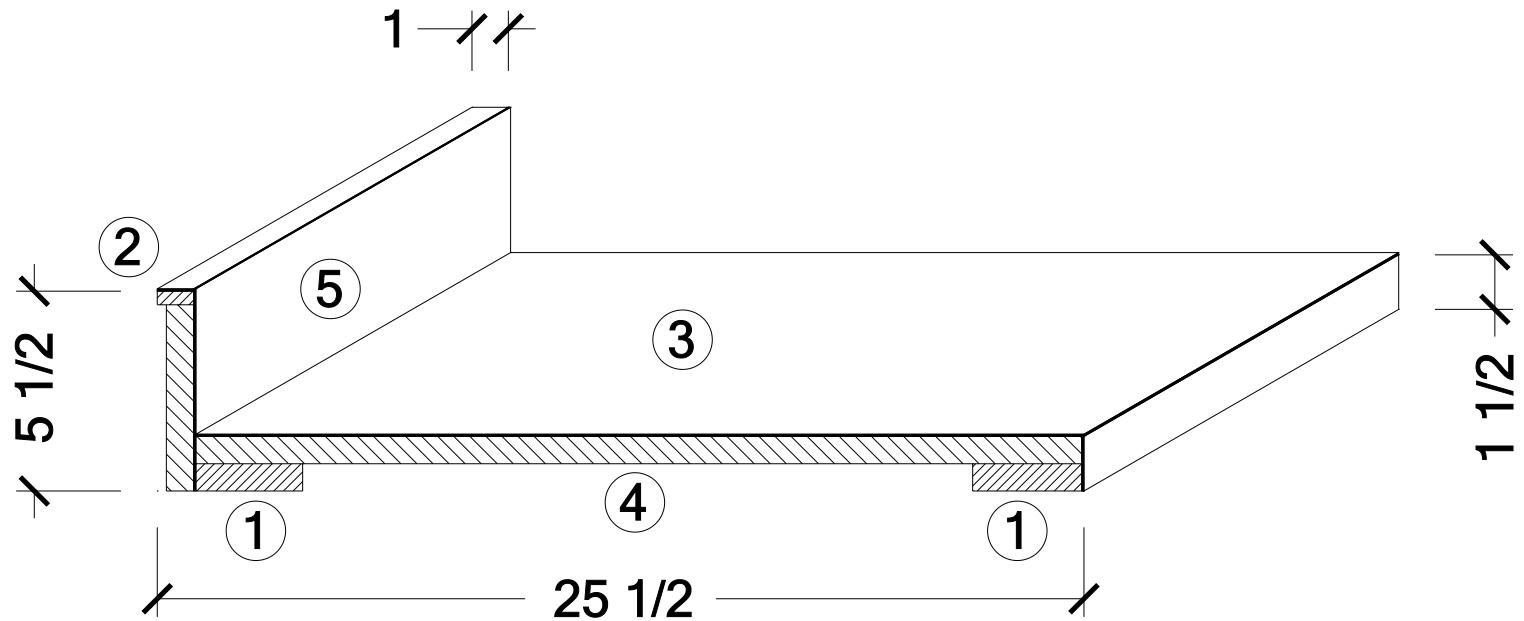

## TYPICAL EV COUNTERTOP CONSTRUCTION

- ① BUILD-UP - 3" wide continuous particle board glued and stapled
- ② SCRIBE STICK - 1/2" thick particle board for easy fitting
- ③ LAMINATE - postforming grade contact cemented to core
- ④ CORE - 3/4" thick solid particle board
- ⑤ SPLASH - 3/4" thick solid particle board screwed and siliconed to core